

Application Step Edge Profile

GVStep - The high-quality step edge profile with specially profiled and embossed tread surface. The profile is slip-resistant and provides optimum protection for the stair edges.

FORM MEETS FUNCTION: STYLE ELEMENT AND SAFETY FACTOR AT ONCE.

Stairs are a defining design element in architecture. The steps provide creative transitions and structure to the space. GVstep combines visual requirements with functional needs. Step edge profiles increase tread safety and protect the edge at the same time against mechanical stresses

INSTALLATION

Choose the GVStep edge profile according to the tile thickness. Apply the adhesive to the edge of the surface to be tiled with a notched trowel. Press in and align the GVstep edge profile in the damp tile adhesive.

TECHNICAL SPECIFICATIONS

Aluminum 6063 T6

Size:

* Tread 50 mm


* Riser 30 mm

Material number: 33.206

All measures, weights and loads as indicated in this data sheet are approximate figures. We can not assume liability for any special applications as well as damage resulting from improper assembly or use, a corresponding suitability test must always be carried out by the customer.

ALUMINIUM

NATURAL
ANODIZED

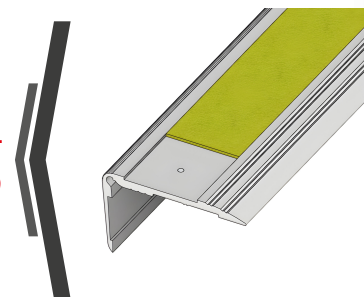

DELIVERY FORM

Depending on the surface.
Size : 50 mm * 30 mm
The profiles are available in lengths:
150,300,400 cm

MATERIAL PROPERTIES

Aluminium GVstep edge profiles are suitable for low to medium mechanical loads in indoor and outdoor areas and have a high resistance to chemicals.

PROCESSING, CARE, CLEANING

The following points must be observed in order to prevent damage on the profiles surfaces:

- » The processing instructions of the tile adhesive must always be observed.
- » Any excess of grout, mortar and tile adhesive on the profile surface should be removed immediately with water.
- » Allow to dry out thoroughly, ensuring the area is well ventilated.
- » The protective film or similar, used for the installation, can only be removed after the paving has dried completely.
- » The profiles are cleaned with a damp cloth and pH-neutral agents. Stubborn dirt on the profiles can also be removed with solvents. Please do not use aggressive cleaning agents for the silicone joint.

DISPOSAL

The profiles can be delivered to authorized aluminium recycling centers.

STORAGE AND TRANSPORT

The profiles should be protected against external and environmental threats.

SURFACES

Natural, Anodized

PACKING UNIT

PU 1 = 10 pcs, PU 2 = 50 pcs, PU 3 = 150 pcs

SPECIAL NOTE

Warranty and disclaimer

The application examples and tips shown in this data sheet and on our website are guidelines based on conventional crafting techniques. All information, including product-related information is standard. The author excludes any warranty for the information given in the data sheet and on the website. For the usability of products for specific purposes and for the occurrence of damage or the occurrence of defects by the information or tips given here, no warranty is also accepted. Errors, misprints and technical changes - as far as they serve the progress - reserved. Photos and illustrations are not binding. No liability for printing and image defects. Imitation and reprinting, even in part, is not permitted.